

LRBFS06W1HC

MediLine




LIEBHERR
Quality, Design and Innovation

Laboratory Refrigerator with Analog Controls Suitable for Flammable Material Storage



Unit Dimensions

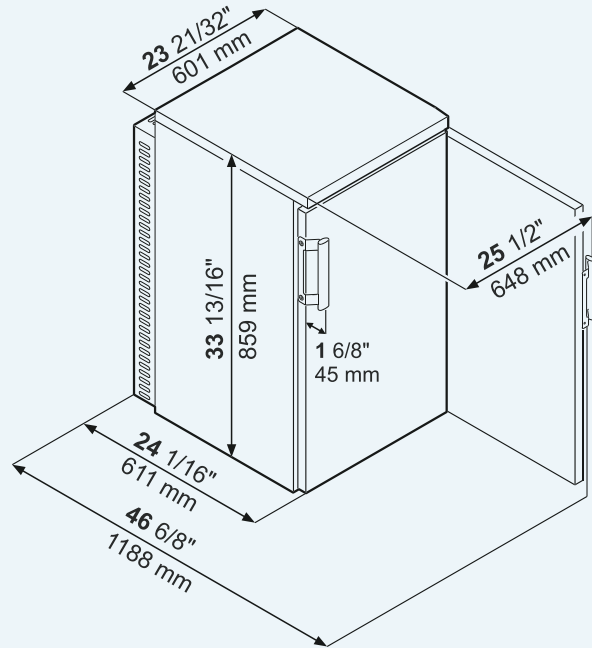

Interior is free from sources of ignition and meets the requirements for Class I, Division 2 for storage of flammable substances in closed containers. Product complies with the applicable requirements of NFPA 45 and NFPA 99.

Subject to alterations.

Laboratory refrigerator with spark-free interior	LRBFS06W1HC MediLine
Total gross/net capacity l (cu.ft.)	180/165 (6.4/5.8)
Exterior dimensions in mm (w/d/h) in inches (w/d/h)	597/611/859 23 9/16"/24 1/16"/33 7/8"
Interior dimensions in mm (w/d/h) in inches (w/d/h)	513/441/702 20 1/4"/17 3/8"/27 11/16"
Energy consumption in 365 days *	372 kWh
Ambient temperature in °C (°F)	10°C to 27°C (50°F to 81°F)
Refrigerant	R600a
Sound rating **	50 dB(A)
Connection rating	1.5 A
Frequency/voltage	60 Hz/115V~
Cooling system	forced-air
Defrost	automatic
Temperature range in °C (°F)	1°C to 15°C (34°F to 59°F)
External cabinet finish	steel/white
Door/lid material	steel
Internal liner material	commercial grade molded polystyrol
Type of control	analog control
Temperature display	external digital
Interior light	n/a
Adjustable shelves	3
Shelf material	glass
Shelf load weight in kg (lbs)	40 (88.2)
Usable shelf area in mm (inches)	513/412 (20 1/4"/16 1/4")
Handle	ergonomic slimline handle
Lock	recessed
Door hinges	right, reversible on site
Insulation in mm (inches)	16–55 (11/16"–2 3/16")
Gross/net weight in kg (lbs)	42/39 (92.6/86)
Accessories	
Glass shelf	9293599

* Measured unloaded at 26.6°C (80°F) ambient temperature with set point of 3.3°C (38°F).

** Noise level – sound power re 1pW – according to IEC 60704-2-14.