

# Convenience At Your Fingertips

Quality, Design and Innovation



# LIEBHERR



**Door-on-door technology:** Allows custom panels to be affixed directly onto the appliance door so that the hinges are concealed, plus the cabinet and the fridge open as one, ensuring a wide range of design options and easy installation.



**SoftSystem:** In built-in appliances, SoftSystem technology allows doors to close automatically and gently from 30° to eliminate slamming even when fully loaded.



The **SUIK 1510** undercounter fridge is suitable for Side-by-Side installation in conjunction with Liebherr's **SUIG 1514** undercounter freezer for integrated use.

Liebherr's **SUIK 1510** undercounter fridge is suitable for built-in Side-by-Side installation together with the SUIG 1514 undercounter freezer. Airflow in our undercounter appliances enters and exits at the front of the appliance – this happens at plinth level or at the top edge of the unit depending on the model type. One advantage is that no ventilation grill is required in the worktop.

Additionally we have SoftSystem technology as an innovative solution for added safety and convenience. Integrated in the door, SoftSystem ensures that it closes automatically and gently from an opening angle of approximately 30°.

Opt for our high-quality and easy-to-fit stainless steel panel and handle<sup>1</sup> to seamlessly integrate this model into your kitchen!


**SUIK 1510**

Comfort




Energy consumption (kWh/y)	227
Sound rating dB(A) *	37
Refrigerator capacity litre	136
Number of shelves	4
Number of door racks	2
Electronic control	MagicEye on front, key electronic
Refrigerator temperature range °C	+2 °C to +9 °C
Defrost type	Automatic
Interior light	LED
Door alarm	Visual and audible
Door type	Door-on-door
Integrated lock	No
SoftSystem	Yes
Door hinges	Right, reversible
Product dimensions (H/W/D) cm	82 - 88 / 59.7 / 55
Cut out dimensions (H/W/D) cm	82 - 88 / 60 / min. 55
Gross / Net weight kg	38.8 / 33.9
Voltage V/Hz	220-240 / 50

**Installation Diagram**

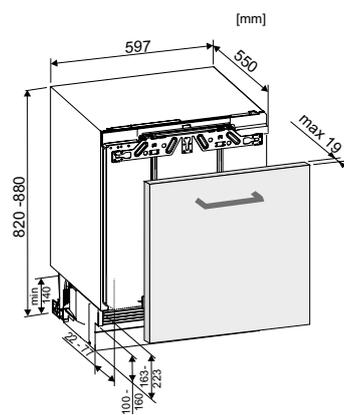

**Ventilation Diagram**

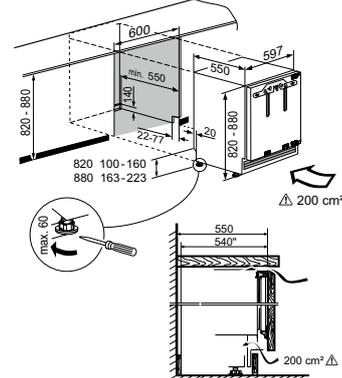

- The airflow cavity must be at least 200 cm<sup>2</sup>  
 - The unit's energy consumption will increase if there is insufficient air flow.

\* Noise output - according to EN 60704-3

<sup>1</sup> Optional accessories: Stainless Steel Panel (Part no. 990043200), Stainless Steel Handle (Part no. 990152700)