

Convenience At Your Fingertips

Quality, Design and Innovation



LIEBHERR



Door-on-door technology: Allows custom panels to be affixed directly onto the appliance door so that the hinges are concealed, plus the cabinet and the fridge door open as one, ensuring a wide range of design options and easy installation.



SoftSystem: In built-in appliances, SoftSystem technology allows doors to close automatically and gently from 30° to eliminate slamming even when fully loaded.



The **SUIG 1514** undercounter freezer is suitable for Side-by-Side installation together with Liebherr's **SUIK 1510** undercounter fridge for integrated use.

Liebherr's **SUIG 1514** undercounter freezer is perfect for built-in Side-by-Side installation together with the **SUIK 1510** undercounter fridge. Airflow in our undercounter appliances enters and exits at the front of the appliance – this happens at plinth level or at the top edge of the unit depending on the model type. One advantage is that no ventilation grill is required in the worktop.

Additionally we have SoftSystem technology as an innovative solution for added safety and convenience. Integrated in the door, SoftSystem ensures that it closes automatically and gently from an opening angle of approximately 30°.

Opt for our high-quality and easy-to-fit stainless steel panel and handle¹ to seamlessly integrate this model into your kitchen!


SUIG 1514

Comfort




Energy consumption (kWh/y)	168
Sound rating dB(A) *	36
Freezer capacity litre	95
Number of door racks	0
Number of freezer drawers	3
Electronic control	MagicEye on front, key electronic
Freezer temperature range °C	-14°C to -26°C
Defrost type	Manual
Interior light	No
Door alarm	Visual and audible
Door type	Door-on-door
Integrated lock	No
SoftSystem	Yes
Door hinges	Left, reversible
Product dimensions (H/W/D) cm	82 - 88 / 59.7 / 55
Cut out dimensions (H/W/D) cm	88.2 - 88 / 60 / min. 55
Gross / Net weight kg	43.1 / 38.2
Voltage V/Hz	220-240 / 50

Installation Diagram

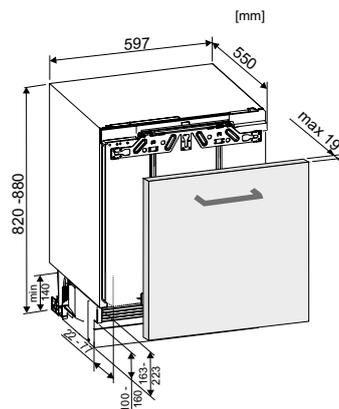

Ventilation Diagram

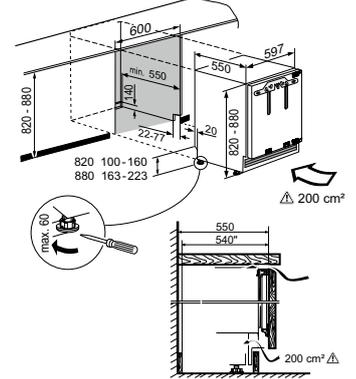

- The airflow cavity must be at least 200 cm²
 - The unit's energy consumption will increase if there is insufficient air flow.

* Noise output - according to EN 60704-3

¹ Optional accessories: Stainless Steel Panel (Part no. 990043200), Stainless Steel Handle (Part no. 990152700)