

LIEBHERR

Contents

001		
1 1.1 1.2 1.3 1.4 1.5 1.6 1.7	Appliance at a glance	3 3 3 4 4 4 4 4
2	General safety instructions	5
3 3.1 3.2 3.3	Functionality of the Touch display Navigation and symbol explanation Menus Sleep mode	6 6 7 7
4 4.1 4.2 4.3	Putting into operation Switching on appliance (first use) Starting the IceMaker for the first time* Starting the EasyTwist-Ice for the first time*	7 7 8 8
5 5.1 5.2 5.3	Storage Information regarding storage Freezer compartment Storage times	8 8 8 9
6	Saving energy	9
7 7.1 7.1.1 7.1.2 7.2 7.2.1	Controls Controls and displays Status display Display symbols Appliance functions Notes on the appliance functions Turn off appliance	9 9 9
•))	WiFi	10
-18 _°	Temperature	11
℃∕ℯ₣	Temperature unit	
**	SuperFrost	
*\()	Start defrosting cycle	
ŴĨ	PartyMode	
$\underline{\mathbb{W}}$	SabbathMode	.12
\bigcirc	E-Saver	.13
	IceMaker *	
5 Ice cube size	IceMaker water supply*	
max) Maxice	MaxIce*	
Ś	TubeClean *	
-) -/- /_	Display brightness	
La la	Door alarm	15

×fm	Input lock	15
Service No: Model Index: Serialit:	Device information	16
HISP HIDDONG FESH XCCCIDXX	Software	16
\tilde{z}	Reminder	. 16
\bigcirc	Demo mode	16
\bigcirc	Resetting to factory settings	17
7.3	Fault messages	17
7.3.1 7.3.2	Warnings Message	
8 8.1 8.2 8.3 8.4 8.5 8.6 8.7	Features Drawers Pull-out board with IceTower* Glass shelves* EasyTwist-Ice* IceMaker* VarioSpace Freezer pack*	 18 19 21 21 22 23 23
9 9.1 9.2 9.3	Maintenance Disassembling / assembling pull-out systems Defrosting the appliance Cleaning the appliance	23 23 24 25
10 10.1 10.2 10.3 10.4 10.5	Customer help Technical specifications Operating noises Technical fault Customer Service Model plate	27 27 28 29 29
11	Shutting down	29
12 12.1 12.2	Disposal Preparing appliance for disposal Disposing of the appliance in an environmentally friendly manner	30 30 30

The manufacturer is continually working on the further development of all types and models. Please be aware that we reserve the right to make changes to the shape, equip-ment and technology.

Symbol	Explanation
	Read instructions
	Please read the information in these instruc- tions carefully to understand all of the benefits of your new appliance.

Symbol	Expla	nation		 Installa "Quick
Symbol	Full in You of intern of th servic manu	estructions on the internet can find detailed instructions et using the QR code on the nese instruction or by enter e number at home.liebherr.com	he front ring the n/fridge-	- "Quick - "Instal - Service 1.2 O equipr
		<i>Fig.</i> Example illi	ustration	
	Check have	c appliance (all parts for transport damage any complaints, please conta or customer service.		
*	These so di apply	Differences These instructions apply to a range of models, so differences are possible. Sections that apply to certain models only are marked with an asterisk (*).		
\land	Instru	ctions and results ctions are marked with a ▶. ts are marked with a ▷.		
		s s about the appliances are ava ouTube channels of Liebherr-Haus		12
These oper	ating in	structions apply to:		12
FN d/e/f		42/46/50/52		12
FN c/d		66/70/72		27
FN sf e		5227		
SFN (bd/s	d/sf) e	52		13 11
GNeu		1460-e/1460 D		
LTGN-234				Fig. 1 Exa

LTGN-234 LTGN-314 GN 4Z2fa4/4Z6fa5/5Z0fa6/5Z2fa7 GNe 42Z4/46Z5/50Z6/52Z7

Note

If your appliance has an N in its appliance designation, it is a NoFrost appliance.

1 Appliance at a glance

1.1 Scope of delivery

Check all parts for transport damage. Contact your dealer or customer service in the event of complaints. (see 10.4 Customer Service)

Your new appliance comes with the following parts:

- Standalone appliance
- Features (depending on the model)

- Installation materials (depending on the model)
- "Quick Start Guide"
- "Installation Guide"
- Service Brochure

1.2 Overview of the appliance and equipment

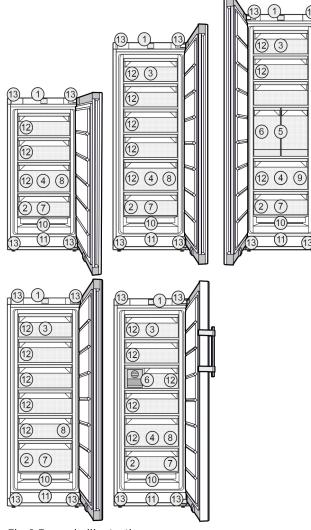


Fig. 1 Example illustration

Equipment (8) Ice cube tray*

- (1) Controls(2) Type plate
- (3) Tilting drawer*
- (4) SpaceBox*
- (5) IceTower*
- (6) IceMaker* / EasyTwist-Ice*
- (10) NoFrost
 (11) Ventilation slit
 (12) VarioSpace
 (13) Adjustable feet (front), transport castors (rear), transport handles at the top (rear) and at the bottom (front)

(9) Ice cube scoop*

(7) Freezer tray*, cold storage accumulator*

Note

Shelves, drawers and baskets are arranged for optimum energy efficiency when the appliance is delivered. Changing how the shelves, for example, are inserted in the fridge compartment does not have any impact on energy consumption.

1.3 SmartDevice

SmartDevice is the networking solution for your freezer.

If your appliance SmartDevice-enabled or compatible, you can quickly and easily connect your appliance to your WiFi. With the SmartDevice app, you can operate your appliance from a mobile device. Additional functions and setting options are available in the SmartDevice SmartDevice app.

SmartDeviceance:

Your appliance is compatible for use compatible appli- with the SmartDeviceBox. You must first purchase and install the Smart-DeviceBox. In order to connect your appliance to the WiFi, you need to download the SmartDevice app.



information smartdevice.liebherr.com More about SmartDevice:

Hausgeräte store:

Purchasing SmartDeviceBox in the Liebherr-

the home.liebherr.com/shop/de/deu/ smartdevicebox.html



After installing and configuring the SmartDevice, you can connect your appliance to the WiFi using the SmartDevice app and the WiFi appliance function (see WiFi).

Note

The SmartDevice function is not available in the following countries: Russia, Belarus, Kazakhstan.

You cannot use the SmartDeviceBox.

1.4 Appliance range of use

Intended use

The appliance is only suitable for cooling food products in a domestic or household-like environment. This includes, for example, use:

- in staff kitchens, bed and breakfast establishments,
- by guests in country houses, hotels, motels and other accommodation.
- for catering and similar services in the wholesale trade.

The appliance is not suitable as a built-in unit.

All other types of use are not permitted.

Foreseeable misuse

The following applications are expressly forbidden:

- Storing and refrigerating medicines, blood plasma, laboratory preparations or similar substances and products based on the Medical Device Directive 2007/47/EC
- Use in areas at risk of explosions

Misusing the appliance may lead to damage to the goods stored or they may spoil.

Climate classifications

Depending on the climate classification the appliance is designed to operate in restricted ambient temperatures. The climate classification applying to your appliance is printed on the rating plate.

Note

► Keep to the specified ambient temperatures in order to guarantee that the appliance works properly.

Climate clas- sification	for ambient temperatures of
SN	10 °C to 32 °C
N	16 °C to 32 °C
ST	16 °C to 38 °C
Т	16 °C to 43 °C
SN-ST	10 °C to 38 °C
SN-T	10 °C to 43 °C

If your appliance does not have a fixed water connection, then the appliance is guaranteed to function correctly down to a lower ambient temperature of -15 °C.*

1.5 Conformity

The refrigerant circuit has been tested for leaks. The appliance complies with the applicable safety regulations and with the corresponding directives.

The full text of the EU Declaration of Conformity is available on the following website: www.Liebherr.com

1.6 SVHC substances according to **REACH** regulation

You can check whether your appliance contains SVHC substances according to REACH regulation at the following link: home.liebherr.com/de/deu/de/liebherr-erleben/nachhaltigkeit/umwelt/scip/scip.html

1.7 EPREL database

Details about energy labelling and ecodesign requirements will be available on the European product database (EPREL) from 1st March 2021. You can access the product database at the following link: https://eprel.ec.europa.eu/ You will be asked to enter the model ID. You can find the model ID on the nameplate.

2 General safety instructions

Please keep these operating instructions in a safe place so you can refer back to them at any time.

If you pass the appliance on, please hand these operating instructions to the next user.

Read these operating instructions carefully before use to ensure safe and correct use of the appliance. Follow the instructions, safety instructions and warning messages included at all times. They are important for ensuring you can operate and install the appliance safely and without any problems.

Danger for the user:

- This device can be used by children and people with impaired physical, sensory or mental abilities or with a lack of experience and knowledge provided that they are supervised or have received instruction in the safe use of this device, and about the resulting hazards. Children must not play with this appliance. Cleaning and user maintenance work must not be carried out by children without adult supervision. Children aged between 3 and 8 are allowed to load and unload the appliance. Children below the age of 3 must be kept away from the appliance unless they are under continuous adult supervision.
- The socket must be easily accessible so that the appliance can be disconnected quickly from the electricity in an emergency. It must not be located in the area behind the appliance.
- When disconnecting the appliance from the supply, always take hold of the plug. Do not pull the cable.
- In the event of a fault pull out the mains plug or deactivate the fuse.
- Do not damage the mains power cable. Do not operate the appliance with a defective mains power cable.
- Only customer service or other specially trained staff may repair or perform other operations on the appliance.
- Only assemble, connect and dispose of the appliance according to the instructions.
- The manufacturer is not liable for damage caused by a faulty fixed water connection.*

Fire hazard:

 The coolant used (information on the model plate) is ecofriendly but also flammable. Any leaking coolant may ignite.

- Do not damage the refrigerant circuit pipes.
- Do not handle ignition sources inside the appliance.
- Do not use electrical appliances inside the appliance (e.g. steam cleaners, heaters, ice cream makers, etc.).
- If the refrigerant leaks: remove any naked flames or ignition sources from the vicinity of the leakage point. Properly air the room. Inform customer services.
- Do not store explosives or sprays using combustible propellants such as butane, propane, pentane, etc. in the appliance. To identify these spray cans, look for the list of contents printed on the can, or a flame symbol. Gases possibly escaping may ignite due to electrical components.
- Keep burning candles, lamps and other items with naked flames away from the appliance so that they do not set the appliance on fire.
- Please be sure to store alcoholic drinks or other packaging containing alcohol in tightly closed containers. Any alcohol that leaks out may be ignited by electrical components.

Danger of tipping and falling:

- Do not misuse the plinth, drawers, doors etc. as a step or for support. This applies particularly to children.

Danger of food poisoning:

- Do not consume food which has been stored too long.

Danger of frostbite, numbness and pain:

 Avoid prolonged skin contact with cold surfaces or refrigerated/frozen goods or take protective measures, e.g wear gloves.

Danger of injury and damage:

- Hot steam can lead to injury. Do not use electrical heating or steam cleaning equipment, open flames or defrosting sprays to defrost.
- Do not use sharp implements to remove the ice.

Risk of crushing:

Do not hold the hinge when opening and closing the door. Fingers may get caught.

Symbols on the appliance:

Functionality of the Touch display



This symbol may be located on the compressor. It relates to the oil in the compressor and makes reference to the risk that: Swallowing or inhaling can be fatal. This advice is only relevant to recycling. There is no danger in normal operation.



This symbol is located on the compressor and indicates the danger of flammable materials. Do not remove the sticker.



This or a similar sticker may be located on the rear of the appliance. This sticker indicates that there are vacuum insulation panels (VIP) or perlite panels in the door and/or housing. This advice is only relevant to recycling. Do not remove the sticker.

Please note the warning messages and other specific advice in the other chapters:

DANGER	indicates an immediately hazardous situation which will lead to death or serious injuries if it is not avoided.
WARNING	indicates a hazardous situation which may lead to death or serious injuries if it is not avoided.
CAUTION	indicates a hazardous situation which may lead to minor or moderate injuries if it is not avoided.
NOTICE	indicates a hazardous situation which may lead to damage to property if it is not avoided.
Note	indicates useful instructions and tips.

3 Functionality of the Touch display

You operate your appliance using the Touch display. You select appliance functions in the Touch display (hereafter referred to as display) by tapping them. If you do not perform any action on the display for 10 seconds, the display either jumps back to the higher-level menu or directly to the status display.

3.1 Navigation and symbol explanation

In the illustrations, different symbols are used to navigate the display. The following table describes these symbols.

Symbol	Description
	Press the Next navigation arrow: Navigates to the next option in the menu.

Symbol	Description
	Press the Back navigation arrow:
	Jumps back one option in the menu.
	Press the navigation arrow several times in succession: Navigates in the menu to the desired function.
S	Press the Confirm symbol: Activates/deactivates func- tion. Opens submenu.
Back	Press the Confirm symbol together with the back icon: Jumps back one menu level.
♦ ©	Arrow with clock: It takes more than 10 seconds for the following message to appear in the display.
• • •	Arrow with a time indication:
2s 5s 10s	It takes the specified amount of time until the following message appears in the display.
	"Open Settings menu" symbol:
	Navigates to the Settings menu and opens the settings menu.
	If necessary: Navigate to the desired function in the Settings menu.
	(see 3.2.1 Opening the Settings menu)
	"Open Advanced menu" symbol:
	Navigates to the Advanced menu and opens the advanced menu. If necessary: Navigate to the desired function in the Advanced menu. (see 3.2.2 Opening the
	Advanced menu)
No action for 10 seconds	If you do not perform any action on the display for 10 seconds, the display either jumps back to the higher- level menu or directly to the status display.

Putting into operation

Symbol	Description
again	If you open the door and immediately close it again, the display jumps directly back to the status display.
Note: Illustrations of the displ	av are shown in the Enalish

Note: Illustrations of the display are shown in the English version.

3.2 Menus

The appliance functions can be found in various menus.

Menu	Description
Main menu	When you switch the appliance on, you are automatically in the main menu.
	From here you can navigate to the most important appliance functions, to the Settings menu and to the Advanced menu.
ک Settings	The Settings menu contains additional appliance functions for setting up your appliance. (see 3.2.1 Opening the Settings menu)
Settings menu	
Advanced menu	The advanced menu contains special appli- ance functions for setting up your appli- ance. Access to the Advanced menu is protected by the numerical code 1 5 1 . (see 3.2.2 Opening the Advanced menu)

3.2.1 Opening the Settings menu




Fig. 2 Example illustration

- Carry out action steps according to the illustration.
- Settings menu is open.
- If necessary: Navigate to the desired function.

3.2.2 Opening the Advanced menu



Fig. 3




Fig. 4 Example illustration, access with numerical code **151**

- Carry out action steps according to the illustration.
 The expanded menu is open.
- If necessary: Navigate to the desired function.

3.3 Sleep mode

If you do not touch the display for 1 minute, the display switches to sleep mode. In sleep mode, the display brightness is dimmed.

3.3.1 Ending sleep mode

- Press any navigation key.
- \triangleright Sleep mode is ended.

4 Putting into operation

4.1 Switching on appliance (first use)

Make sure that the following requirements are fulfilled:

□ The appliance has been installed and connected in accordance with the installation instructions.

- All adhesive strips, adhesive and protective films and transport locks are removed from inside and on the appliance.
- All marketing leaflets are removed from the drawers.
- □ You are familiar with the functionality of the Touch display. (see 3 Functionality of the Touch display)
- Switch on the appliance using the Touch display:




Fig. 5 Example illustration

- \triangleright The status display appears.
- \triangleright The appliance cools to the temperature set at the factory. \triangleright The appliance starts in demo mode (status display with
- DEMO appears): If the appliance starts in demo mode (starts display with DEMO appears): If the appliance starts in demo mode, you can deactivate demo mode within the next 5 minutes. (see Demo mode)

Storage

More information:

- Start the IceMaker for the first time. (see 4.2 Starting the IceMaker for the first time*) *
- Start the EasyTwist-Ice for the first time. (see 4.3 Starting the EasyTwist-Ice for the first time*) *
- Start the SmartDevice for the first time. (see 1.3 Smart-Device) and (see WiFi)

Note

The manufacturer recommends:

- Store frozen foods at -18 °C or colder.
- Observe the notes on storing food. (see 5.1 Information regarding storage)

Note

Accessories can be purchased from the Liebherr-Hausgeräte store at home.liebherr.com/shop/de/deu/ zubehor.html.

4.2 Starting the IceMaker for the first time*

If your appliance is equipped with IceMaker, you must clean the IceMaker **before using it for the first time**.

Make sure that the following requirements are fulfilled:

- The water supply has been connected. See Installation Guide or mounting instructions.*
 The application property connected
- The appliance is properly connected.
- Clean the IceMaker. (see 9.3.5 Cleaning the EasyTwist-Ice*) *

4.3 Starting the EasyTwist-Ice for the first time*

If your appliance is equipped with EasyTwist-Ice, you must clean the EasyTwist-Ice **before using it for the first time**. Make sure that the following requirements are fulfilled:

□ The appliance is properly connected.

- Clean the EasyTwist-Ice. (see 9.3.5 Cleaning the Easy-Twist-Ice*)
- ▶ Fill the water tank.

5 Storage

5.1 Information regarding storage



Risk of fire

Do not use any electrical appliances in the food area of the appliance unless recommended by the manufacturer.

Note

The energy consumption increases and the cooling power goes down if ventilation is not sufficient.

Always keep air slots clear.

Observe the following specifications for storage:

- Keep the air vents on the inside of the rear wall free.
- Keep the air vents on the fan free.
- Package food properly.
- Package raw meat or fish in clean, closed containers. This will prevent meat or fish from touching or dripping onto other food.
- Leave space between goods to ensure good air circulation.

- Store food according to the instructions on the packaging.
- Always observe the best-before date indicated on the packaging.

Note

Failure to follow these guidelines can lead to foodstuffs spoiling.

5.2 Freezer compartment

Here, a dry, frosty storage climate is created at -18 °C. The frosty storage climate is suitable for storing frozen food for several months, for making ice cubes or freezing fresh food.

5.2.1 Freezing food

Freezing quantity

The maximum amount of fresh food that you can freeze within 24 hours is specified on the type plate (see 10.5 Model plate) under "Freezing capacity ... kg/24h".

To ensure that food quickly freezes through, adhere to the following quantities per package:

- Fruit and vegetables up to 1 kg
- Meat up to 2.5 kg

Freezing food using SuperFrost

Depending on the quantity to be frozen, you can activate SuperFrost before freezing in order to achieve lower freezing temperatures. (see SuperFrost)

Activate SuperFrost if the amount of food you have to freeze is more than approx. 2 kg.

The time at which you activate SuperFrost depends on the amount of food you have to freeze:

Freezing quan- tity	Time at which you should activate SuperFrost
Small amount of food to freeze	Activate SuperFrost about 6 hours before freezing.
	You can place the food in the freezer as soon as the appliance automatically deactivates SuperFrost.
Maximum amount of food	Activate SuperFrost about 24 hours before freezing.
to freeze	You can place the food in the freezer as soon as the appliance automatically deactivates SuperFrost.

Arranging your food properly



Risk of injury from broken glass!

Bottles and cans with beverages can burst during freezing. This applies in particular to carbonated beverages.

Only freeze bottles and cans with beverages if you have activated the BottleTimer function in the SmartDevice app.

Freezing quan- tity	Arranging your food properly
food to freeze	Place packaged food in the top drawer. If possible, place groceries at the back of the drawer near the rear wall.

Freezing quan- tity	Arranging your food properly
Maximum amount of food to freeze	Distribute packaged groceries throughout all drawers, but do not place any groceries in the bottom drawer.
	If possible, place groceries at the back of the drawer near the rear wall.

5.2.2 Defrosting food

Risk of food poisoning!

- Do not re-freeze thawed food.
- Use defrosted foodstuff as soon as possible.

You can defrost food in several ways:

- In the fridge compartment
- In the microwave
- In the oven/fan-assisted oven
- At room temperature
- ► Take out only as much food as necessary.

5.2.3 Freezer tray*

You can freeze berries, herbs, vegetables and other small frozen food in the freezer tray without it all freezing together. The frozen food is less likely to get squashed and subsequent portioning is easier.

In addition, you can store the cold storage accumulators in the freezer tray to save space.*

Distribute food on the freezer tray without packaging and well spaced out.

5.3 Storage times

Refer to the specified storage times as a guide.

In the case of foods with a minimum shelf life, the date indicated on the packaging still applies.

Recommended storage period for various types of food		
Ice cream	at -18 °C	2 to 6 months
Sausages, ham	at -18 °C	2 to 3 months
Bread, baked goods	at -18 °C	2 to 6 months
Game, pork	at -18 °C	6 to 9 months
Fatty fish	at -18 °C	2 to 6 months
Lean fish	at -18 °C	6 to 8 months
Cheese	at -18 °C	2 to 6 months
Poultry, beef	at -18 °C	6 to 12 months
Vegetables, fruit	at -18 °C	6 to 12 months

6 Saving energy

- Pay attention to good ventilation. Do not cover ventilation holes or grids.
- Always keep the fan air slits clear.
- Do not install the appliance in direct sunlight, next to an oven, radiator or similar.
- Energy consumption depends on the installation conditions, e.g. the ambient temperature (see 1.4 Appliance range of use) . A warmer ambient temperature can increase the energy consumption.

- Open the appliance for as short a time as possible.
- The lower the temperature is set the higher the energy consumption.
- Keep all food properly packed and covered. This prevents frost from forming.
- Inserting warm food: allow to cool down to room temperature first.

7 Controls

7.1 Controls and displays

7.1.1 Status display



Fig. 6

(1) Temperature display

The Status display shows the set temperature and is the home display. From there, you can navigate to the options and settings.

7.1.2 Display symbols

Display symbols provide information on the current appliance status:

Symbol	Appliance status
\bigcirc	Standby The appliance or temperature zone is switched off.
	Flashing number Appliance is working. Temperature flashes until the set value is reached.
	Flashing symbol Appliance is working. Setting is made.

Bar grows steadily

Function is activated.

7.2 Appliance functions

7.2.1 Notes on the appliance functions

The appliance functions are set at the factory so that your appliance is fully functional.

Before you alter, activate or deactivate the device functions, make sure that the following requirements are met:

- You have read and understood the descriptions of how the display works.
- You have familiarised yourself with the operating and display elements of your appliance.

U Turn off appliance

This setting turns off the whole appliance.

Switching off the entire appliance





Fig. 8

- Turning off the IceMaker .*
- \triangleright Off: Display goes black.



Use this function to connect your appliance to WiFi. You can then operate it via the SmartDevice app on a mobile device. You can also use this function to disconnect or reset the WiFi connection.

To connect your device to WiFi, you need the SmartDeviceBox.

More information on the SmartDevice: (see 1.3 SmartDevice)

Note

The SmartDevice function is not available in the following countries: Russia, Belarus, Kazakhstan.

You cannot use the SmartDeviceBox.

Establishing the WiFi connection for the first time

Make sure that the following requirements are fulfilled:

- □ You have purchased and inserted a SmartDeviceBox. (see 1.3 SmartDevice)
- □ You have installed the SmartDevice app (see apps.home.liebherr.com).
- □ Registration in the SmartDevice app is completed.



Fig. 9





Fig. 10

- Carry out action steps according to the illustration.
- \triangleright Connection is established.

Disconnecting from the WiFi

Fig. 11






- Carry out action steps according to the illustration.
- \triangleright There is no connection.

Resetting the WiFi connection



Fig. 13





- Carry out action steps according to the illustration.
- ▷ WiFi connection and other WiFi settings are reset to factory settings.

Showing information about the WiFi connection








Fig. 16

Carry out action steps according to the illustration.

-18. Temperature

Use this function to set the temperature.

The temperature depends on the following factors:

- How often the door is opened
- How long the door is open for
- The room temperature of the installation site
- The type, temperature and amount of food

Freezer compartment Recommended setting

-18 c

-18 °C

Setting temperature




Fig. 17

Carry out action steps according to the illustration.
 Temperature is set.

Temperature unit

Use this function to set the temperature unit. You can set degrees Celsius or degrees Fahrenheit as the temperature unit.

Setting the temperature unit



Fig. 18

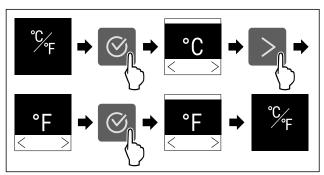


Fig. 19 Example illustration: Switch from degrees Celsius to degrees Fahrenheit.

- Carry out action steps according to the illustration.
- \triangleright The temperature unit is set.

* SuperFrost

This function selects the lowest freezing temperature. This gives you colder storage temperatures.

Use:

- For storing more than 2 kg fresh food every day.
- Freezing fresh food quickly to the core.
- Increasing the cold reserves in the stored goods before defrosting the appliance.

Activating/deactivating the function

- With a small amount to freeze:
- Activate 6 hours before use.
- With a maximum amount to freeze:Activate 24 hours before use.
- Activating/deactivating.

The function automatically turns off. The appliance goes back to normal mode. The temperature adjusts itself to the set level.

* Start defrosting cycle

Use this function to start the automatic defrosting cycle manually if it does not start automatically in the event of a fault.

Starting defrosting cycle



Fig. 20




Fig. 21

- Carry out action steps according to the illustration.
- Defrosting cycle has started: Icon flashes until defrosting cycle is automatically completed.
- ▷ When defrosting cycle is finished: The device continues to run in normal mode.

Controls

Cancelling defrosting cycle

The defrosting cycle will be stopped automatically. However, you can also cancel the defrosting cycle at any time during the defrosting process:




Fig. 22

- Carry out action steps according to the illustration.
- \triangleright Defrosting cycle is cancelled.
- \triangleright The device continues to run in normal mode.

₩ P:

PartyMode

You can use this function to activate or deactivate Party-Mode. PartyMode activates various functions that are useful for a party.

PartyMode activates the following functions:

- SuperFrost (see SuperFrost)
- IceMaker (see IceMaker *) and MaxIce (see MaxIce*) *

You can adjust all listed functions individually and flexibly. When you deactivate PartyMode, all changes are discarded.

If the function is active, the device operates at higher power. As a result, the device's operating noise may be temporarily louder and energy consumption will increase.

Activating PartyMode

Make sure that the following requirements are fulfilled:*

□ The IceMaker has been started. (see 4.2 Starting the IceMaker for the first time*)



Fig. 23




Fig. 24

- Carry out action steps according to the illustration.
- PartyMode and the associated functions are activated.
 The current temperature flashes until the target tempera-

ture is reached. Deactivating PartyMode

The PartyMode is automatically deactivated after 24 seconds. However, you can also deactivate PartyMode manually at any time:



Fig. 25




Fig. 26

- Carry out action steps according to the illustration.
- \triangleright PartyMode is deactivated.
- The appliance cools to the temperature set previously: The current temperature flashes until the target temperature is reached.



SabbathMode

You can use this function to activate or deactivate SabbathMode. If you activate this function, some electronic functions are switched off. As a result, your device meets the religious requirements for Jewish holidays such as Sabbath and complies with STAR-K Kosher certification.

Device status when SabbathMode is active				
The status display shows SabbathMode permanently.				
All functions on the display are locked except for the Deactivate SabbathMode function .				

Active functions remain active.

The display remains bright when you close the door.

Reminders are not implemented. The set time interval stops.

Reminders and warnings are not displayed.

There is no door alarm.

There is no temperature alarm.

The IceMaker is switched off.*

The defrosting cycle operates only for the specified time, without considering the device consumption.

After a power failure, the device returns to SabbathMode. *Device status*

Note

This appliance has certification from the "Institute for Science and Halacha". (www.machonhalacha.co.il)

You can find a list of STAR-K-certified appliances at www.star-k.org/appliances.

Activating SabbathMode



Danger of food poisoning from spoiled food!

If you have SabbathMode activated and a power failure occurs, no message appears in the status display about the power failure. Once the power is restored, the appliance continues to operate in SabbathMode. The power failure may mean that food spoils and the consumption of this food could lead to food poisoning.

After a power failure:

Do not consume food that was frozen and has thawed out.



Fig. 27




Fig. 28

- Carry out action steps according to the illustration.
- \triangleright SabbathMode is activated.
- Dash The status display shows SabbathMode permanently.

Deactivating SabbathMode

The SabbathMode is automatically deactivated after 80 hours. However, you can also deactivate SabbathMode manually at any time:




Fig. 29

Carry out action steps according to the illustration.
 SabbathMode is deactivated.

C E-Saver

You can use this function to activate or deactivate Energy saving mode. If energy saving mode is activated, the energy consumption decreases and the temperature in the device increases. The food remains fresh, but the shelf life is shortened.

Temperature zone	Recommended setting (see Temperature)	Temperature wit active E-Saver	h
-18 °°	-18 °C	-16 °C	

Temperatures

Activating E-Saver



Fig. 30



Fig. 31

- Carry out action steps according to the illustration.
- ▷ Energy saving mode is activated.

Deactivating E-Saver



Fig. 32



Fig. 33

- Carry out action steps according to the illustration.
- Dash Energy saving mode is deactivated.

IceMaker *

You can activate or deactivate ice cube production with this function.

More information on the number of ice cubes:	(see 10.1 Technical specifications)
More information on increasing the number of ice cubes:	(see MaxIce*)
Further information on the IceMaker water supply:	(see IceMaker water supply*)
More information on cleaning the lines of the IceMaker:	(see TubeClean *)

If the function is active, the device operates at higher power. As a result, the device's operating noise may be temporarily louder and energy consumption will increase.

Activating IceMaker

Make sure that the following requirements are fulfilled:

- □ The water supply is established at the fixed water connection. See installation instructions.*
- □ IceMaker is put into operation. (see 8.5 IceMaker*)



Fig. 34




Fig. 35

- Carry out action steps according to the illustration.
- \vartriangleright IceMaker is activated. It can take up to 24 hours for the IceMaker to produce the first ice cubes.

Controls

Deactivating IceMaker



Fig. 36



Fig. 37

- Carry out action steps according to the illustration.
- ▷ IceMaker is deactivated.
- \triangleright If ice cubes are currently being made, the system completes the process.
- \triangleright The IceMaker goes off automatically.



IceMaker water supply*

Use this function to set the IceMaker water supply. The IceMaker water supply regulates the amount of water supplied. The IceMaker water supply can be changed if the water supply does not match the water pressure and the ice cube size dispensed.

The IceMaker water supply is pre-set to value 5 as delivered. A value from 1 (smallest inflow volume) to 8 (largest inflow volume) can be selected.

Setting the IceMaker water supply

Make sure that the following requirements are fulfilled:

- □ The IceMaker has been started. (see 4.2 Starting the IceMaker for the first time*)
- IceMaker is activated. (see IceMaker *)



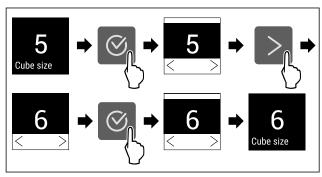


Fig. 39 Example illustration: Switch from value 5 to value 6

Carry out action steps according to the illustration.

 \triangleright IceMaker water supply is set.

MaxIce*

Use this function to increase the number of ice cubes in the IceMaker.

More information the (see 10.1 Technical specifion number of ice cubes: cations)

Activating MaxIce

If you activate MaxIce and have not previously activated the IceMaker (see IceMaker *) function, then by pressing Maxice you can also automatically activate the iceMaker function.

If you have not yet activated the IceMaker function, make sure that the following requirements are met:

- \square The water supply is established at the fixed water connection. See installation instructions.*
- IceMaker is put into operation. (see 8.5 IceMaker*)



Fig. 40




Fig. 41

- Carry out action steps according to the illustration.
- MaxIce is activated.
- ▷ If you have not activated the IceMaker function before: IceMaker is activated.

Deactivating MaxIce

If you deactivate MaxIce, then the IceMaker function is still activated.




Fig. 42



Fig. 43

- Carry out action steps according to the illustration.
- ▷ MaxIce is deactivated.

TubeClean *

You can use this function to activate or deactivate Tube-Clean. If TubeClean is activated, it cleans the IceMaker lines.

Activating TubeClean

Make sure that the following requirements are fulfilled:

- □ IceMaker cleaning is prepared. (see 9.3.6 Cleaning the IceMaker*)
- Empty container with a capacity of 1.5 l and with a maximum height of 10 cm is ready.
- Place the container in the drawer under the IceMaker.



Fig. 44



Fig. 45

- Carry out action steps according to the illustration.
- ▷ TubeClean is activated.
- The cleaning process has started: Icon flashes until the cleaning process is automatically completed after 60 minutes.
- ▷ When the cleaning process is complete: The device continues to run in normal mode.

Deactivating TubeClean

TubeClean is automatically ended after 60 minutes. However, TubeClean can also be deactivated at any time during the cleaning process:




Fig. 46

- Carry out action steps according to the illustration.
- ▷ TubeClean is deactivated: Cleaning process is aborted.
- \triangleright The device continues to run in normal mode.



Display brightness

Use this function to set the display brightness in stages.

You can select the following brightness levels:

- 40 %
- 60 %
- 80%
- 100 % (pre-setting)

Setting the display brightness



Fig. 47




Fig. 48 Example illustration: Switch from 80 % to 60 %.

• Carry out action steps according to the illustration.

 \triangleright The display brightness is set.

Door alarm

Use this function to activate or deactivate the door alarm. The door alarm sounds if the door is open for too long. The door alarm is activated on delivery. You can set how long the door may be open before the door alarm sounds.

The following values can be set:

- 1 minute
- 2 minutes
- 3 minutes
- Off

Setting the door alarm



Fig. 49




Fig. 50 Example illustration: Change door alarm from 1 minute to 3 minutes.

Carry out action steps according to the illustration.
 The door alarm is set.

Deactivating the door alarm




Fig. 52




Fig. 53

Carry out action steps according to the illustration.

 \triangleright The door alarm is deactivated.

Input lock

You can use this function to activate or deactivate the input lock. The input lock prevents the appliance being operated accidentally, e.g. by children.

Controls

Application:

- Avoid unintentional modification of functions.
- Avoid unintentional switching off of the device.
- Avoid unintentional temperature setting.

Activating the input lock

If you activate the input lock, you can continue to navigate in the menus but you cannot select or change other functions.



Fig. 54




Fig. 55

Carry out action steps according to the illustration.
 Input lock is activated.

Deactivating the input lock



Fig. 56



Fig. 57

- Carry out action steps according to the illustration.
- \triangleright Input lock is deactivated.

Device information

Use this function to indicate the model name, index, serial number and service number of your device. You will need the device information when you contact customer service. (see 10.4 Customer Service)

This function also opens the Advanced menu. (see 3 Functionality of the Touch display)

Indicating the device information



Fig. 58



Fig. 59

- Carry out action steps according to the illustration.
- \triangleright Display indicates device information.



Use this function to indicate the software version of your device.

Indicating the software version



Fig. 60



Fig. 61

- ► Carry out action steps according to the illustration.
- \triangleright Display indicates software version.



Reminders are given out acoustically by a beep and visually by a symbol in the display. The signal gets louder until the alert stops.

Activating the setting

Activating/deactivating.



Demo mode

Demo mode is a special feature for dealers who want to demonstrate appliance features. If you activate demo mode, all refrigeration functions are deactivated.

If you switch on your appliance and "Demo" appears in the status display, then demo mode is already activated.

If you activate and then deactivate demo mode, the appliance will be reset to factory defaults. (see Resetting to factory settings)

Activating demo mode



Fig. 62

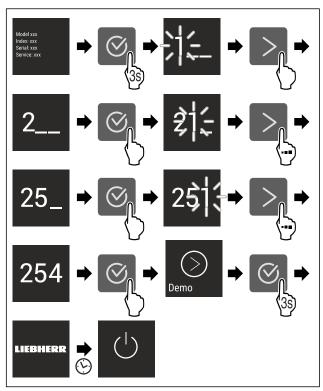


Fig. 63

- Carry out action steps according to the illustration.
- \triangleright Demo mode is activated.
- \triangleright Appliance is switched off.
- Switch on the appliance. (see 4.1 Switching on appliance (first use))
- \triangleright "DEMO" appears in the status display.

Deactivating demo mode



Fig. 64

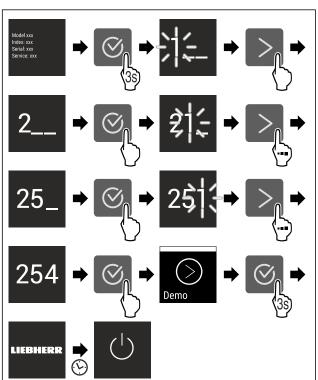


Fig. 65 ► Carry o

- Carry out action steps according to the illustration.
- \triangleright Demo mode is deactivated.
- \triangleright Appliance is switched off.
- Switch on the appliance. (see 4.1 Switching on appliance (first use))
- \triangleright Appliance is reset to factory settings.

Resetting to factory settings

Use this function to reset all settings to factory defaults. All settings you have made so far are reset to their original settings.

Performing a reset



Fig. 66



Fig. 67

- Carry out action steps according to the illustration.
- ▷ Device is reset.
- \triangleright Device is switched off.
- Restart the device. (see 4.1 Switching on appliance (first use))

7.3 Fault messages

Fault messages appear in the display. There are two categories of fault message:

Category	Meaning
Message	Reminder of general procedures. You can carry out these procedures to eliminate the message.
Warning	Appears when there are malfunctions. A signal sounds in addition to the display. The signal becomes louder until you acknowledge by tapping the display. You can eliminate simple defects yourself. For more serious defects, you must contact customer service.

7.3.1 Warnings



Close the door

This message appears if the door is open for too long.

You can set how long it takes for this message to appear . ► Stop alarm: Confirm the message. -or-

Close the door.

Nower cut

This message appears if the freezer temperature increased due to a power cut. After the power is restored, the appliance continues to work at the set temperature.

- Stop alarm: Confirm the message.
- \triangleright Temperature alert appears (see Temperature alarm).

Features

JA Te

O Temperature alarm

This message appears if the temperature does not match the set temperature.

Variations in temperature could be because:

- Hot, fresh food was inserted.
- Too much warm room air flowed in when rearranging and removing food.
- The power was cut off for a while.
- The appliance is faulty.

When the fault is eliminated the appliance continues to work at the set temperature.

- Confirm the display.
- \triangleright The highest temperature is shown.
- Confirm display again.
- \triangleright The status display is displayed.
- ▷ The current temperature is shown.



This message appears if there is a fault with the appliance. An appliance component indicates a fault.

- Open the door.
- Note down the fault code.
- Confirm the message.
- \triangleright The signal tone stops.
- \triangleright The status display appears.
- Close the door.
- Contact customer service. (see 10.4 Customer Service)

7.3.2 Message

Insert IceMaker drawer*

- This message appears if the IceMaker drawer is open.
- Push in the IceMaker drawer.
- \triangleright The message disappears.
- ▷ The IceMaker produces ice cubes.

8 Features

8.1 Drawers

You can remove the drawers for cleaning.

You can remove the drawers to use VarioSpace.

The way to remove/insert the drawers varies depending on the pull-out system. Your appliance can contain various pull-out systems.

Note

The energy consumption increases and the cooling power goes down if ventilation is not sufficient.

- Leave the bottom drawer in the appliance!
- Always leave the fan air vents clear on the back wall!

8.1.1 Drawer on telescopic rails*

The drawer runs on extendible rails (telescopic rails). There are fully extendible telescopic rails and telescopic rails with partial pull-out. Drawers which are fully extendible can be pulled out fully from the appliance. Drawers with partial pull-out cannot be removed fully from the appliance. The system in your appliance depends on the type of appliance.

Drawer on glass shelf*

The drawer guided on a glass shelf is a partial pull-out.

Removing drawer




Fig. 68

- ▶ Pull out drawer as far as it will go. *Fig. 68 (1)*
- Lift drawer on the left. Fig. 68 $(\tilde{2})$
- ▶ Insert left rail. *Fig. 68 (3)*




Fig. 69

- Lift drawer on the right. Fig. 69 (4)
- ▶ Insert right rail. Fig. 69 (5)
- Remove drawer to the front. Fig. 69 (6)





Fig. 70


If the rails are not yet fully inserted after removing the drawer:

Push rails in completely.

Inserting drawer



- *Fig. 71* ► Slide rails in.
- Place drawer on rails at an angle.





- ► Lower drawer.
- Slide in drawer to the back.

8.1.2 Top tilting drawer*

When you pull out the top drawer, it tilts forward. This gives you a better view into the drawer. The function depends on the height of the appliance.

Removing drawer




Fig. 73

- Pull out drawer as far as it will go.
- ► Lift drawer at the front.
- Lift drawer from below.
- Remove drawer to the front.

Inserting drawer




Fig. 74

- ▶ Guide drawer around the upper stoppers. *Fig. 74 (1)*
- Place drawer at an angle behind the lower stoppers onto moulded rib. Fig. 74 (2)
- Lower drawer.
- Slide to the back.

8.1.3 Drawer on moulded rib

The drawer runs directly on the moulded rib. There are no rails.

Removing drawer




Fig. 75

- ▶ Pull out drawer as far as it will go.
- Lift up drawer at the front. *Fig.* 75 (1)
- Remove drawer to the front. Fig. 75 (2)

Inserting drawer




Fig. 76

- Place drawer at an angle behind the stoppers on the moulded rib. (see Fig. 76)
- Lower drawer.
- Slide in drawer to the back.

8.1.4 Bottom drawer

The drawer is the lowest drawer in the appliance. It runs directly on the moulded rib. There are no rails.

Removing drawer




Fig. 77

- ▶ Pull out drawer as far as it will go.
- ▶ Lift up drawer at the front. *Fig. 77 (1)*.
- Remove drawer to the front. *Fig. 77 (2)*.

Inserting drawer




Fig. 78

- ► Guide drawer in at an angle around the stoppers *Fig. 78 (1).*
- Lower drawer.
- Slide in drawer to the back.

8.2 Pull-out board with IceTower*

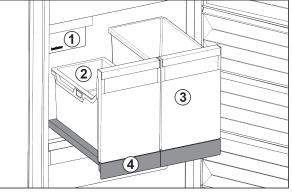


Fig. 79 Pull-out board with IceTower

(1) IceMaker (3)

(3) Container for pizza or alcoholic beverages, for example(4) Pull-out board

(2) Hang-on tray for ice (4) Pull-out board cubes

There are two high (IceTower) containers on the pull-out board. Ice cubes from the IceMaker are collected and stored in the *Fig. 79 (2)* container. The container *Fig. 79 (3)* is suitable for storing tall foodstuffs or beverages such as pizzas or alcoholic drinks.

The pull-out board with IceTower is mounted on a glass shelf with pull-out rails. You can dismantle the pull-out board for cleaning.

8.2.1 Dismantling the pull-out board with IceTower

Removing the container




Fig. 80

- Pull out the pull-out board.
- Lift the container Fig. 80 (5) at the front.
- Remove the container.




Fig. 81

- Remove the hang-on tray *Fig. 81 (6)*.
- If there are ice cubes in the hang-on tray: Empty the hang-on tray.
- ▷ The container and hang-on tray have been removed and you can clean them. (see 9.3.4 Clean the components)

Removing the pull-out board

Ensure that the following conditions are met:

Containers have been removed. (see Removing the container)




Fig. 82

- Slide in the pull-out board. *Fig. 82* (7)
- Lift the pull-out board on the front left. Fig. 82 (8)
- Lift the pull-out board on the front right. Fig. 82 (9)
- \triangleright Pull-out board is detached from the attachment at the front.
- ▶ Take out the pull-out board to the front. Fig. 82 (10)
- The pull-out board has been removed and you can clean it. (see 9.3.4 Clean the components)

Removing the glass shelf from under the pull-out board

(see 8.3 Glass shelves*)

8.2.2 Inserting the pull-out board with IceTower

Inserting the glass shelf from under the pull-out board (see 8.3 Glass shelves*)

Inserting the pull-out board




Fig. 83

Slide the rails in.




Fig. 84

- Place the pull-out board in at an angle behind the front lug.
- Slide in at an angle. Make sure that the stop is behind the lug on both sides. Fig. 84 (11)
- Lower the pull-out board at the front. Fig. 84 (12)




Fig. 85

- ▶ Push the pull-out board down at the front.
- \triangleright Pull-out board clicks into place.

Inserting the container

- Ensure that the following conditions are met:
- The pull-out board is inserted. (see Inserting the pull-out board)




Fig. 86

- ▶ Pull out the pull-out board.
- Hold the pull-out board with one hand.

Note

The containers are shaped in a way that they cannot be interchanged.

- Place the container at an angle on the pull-out board. Fig. 86 (13)
- Slide the container to the back at an angle. Fig. 86 (14)
- Place container in the front. Fig. 86 (15)




Fig. 87

- Insert hang-on tray Fig. 87 (6) for ice cubes.
- Slide in the pull-out board with (IceTower) container. *Fig. 87 (16)*
- \triangleright Pull-out shelf with IceTower is fully inserted.

8.3 Glass shelves*

NOTICE

Impermissible removal of the glass panel above the IceTower!*

Damage to the IceMaker. The IceMaker is attached to the glass panel above the IceTower.

• Do not remove the glass panel above the IceTower.

You can remove the glass shelves under the drawers for cleaning.


You can remove the glass shelves under the drawers to use VarioSpace.

8.3.1 Removing / inserting the glass shelf

Make sure that the following requirements are fulfilled:

- □ Glass shelf under the drawer: The drawer has been removed. (see 8.1 Drawers)
- Pull-out board under IceTower: IceTower has been removed. (see 8.2 Pull-out board with IceTower*) *

Removing glass shelf



- Fig. 88 Example illustration of glass shelf
- Lift glass shelf at the front. *Fig. 88 (1)*
- Take out glass shelf to the front. Fig. 88 (2)

Inserting glass shelf




Fig. 89 Example illustration of glass shelf

- Position glass shelf at an angle behind the stoppers. (see Fig. 89)
- Lower glass shelf.
- Slide in glass shelf to the back.

8.4 EasyTwist-Ice*

With the EasyTwist-Ice you can make enough ice cubes for the whole household. The EasyTwist-Ice is supplied with water via a water tank.




Fig. 90 Example illustration

- (1) Freezer drawer with EasyTwist-Ice
- (4) Rotary knob
- (2) Body with ice cube tray (5) Ice cube drawer
- (3) Water tank

Features

Note

Do not change the position of the freezer drawer with the EasyTwist-Ice in the appliance.

8.4.1 Making ice cubes

The amount of ice cubes you can make in a given period of time with the EasyTwist-Ice depends on the freezer temperature of the appliance. The lower the temperature in the appliance, the more ice cubes you can make.

Maximum number of ice cubes in the ice cube tray:	20 ice cubes
Maximum capacity of the ice cube drawer:	40 ice cubes (equivalent to two ice cube batches)
More information about the time needed for ice cube production:	

Make sure that the following requirements are fulfilled: Components of the EasyTwist-Ice have been cleaned.

Filling the water tank

Risk of poisoning due to contaminated water! Only fill the water tank with potable water.

NOTICE

Sugar-content liquids!

Damage to EasyTwist-Ice.Only fill with cold drinking water.

Note

Using filtered, decarbonised water ensures the best-tasting drinking water for your ice cubes.

This water quality can be achieved using a table water filter of the kind available in trade retail outlets.

 Always fill the water tank only with filtered, decarbonised drinking water.




Fig. 91

- Pull out freezer drawer as far as it will go.
- ▶ Lift the water tank at the recess Fig. 91 (1).
- Remove the water tank by lifting it upwards. *Fig. 91 (2)*
- Fill the water tank with drinking water up to the mark Fig. 91 (3).




Fig. 92

- Position the water tank at the front. Fig. 92 (1)
- Lower the water tank at the rear. Fig. 92 (2)
- Slide in the freezer drawer.

Releasing the ice cubes

Make sure that the following requirements are fulfilled:

- □ The required time for the production of ice cubes has been observed. (see 10.1 Technical specifications)
- Freezer drawer is fully inserted.
- □ Ice cube drawer is fully inserted.
- Turn the rotary knob Fig. 90 (4) clockwise as far as it will go.
- \triangleright Ice cubes fall from the ice cube tray into the ice cube drawer *Fig. 90 (5)*.
- If all the ice cubes do not come out of the ice cube tray:
- Turn the rotary knob clockwise several times to the stop.

8.5 IceMaker*

The IceMaker will produce ice cubes for household use only.

Ensure that the following conditions are met:

- IceMaker is cleaned (see 9 Maintenance) .
- IceMaker drawer is cleaned.
- IceMaker drawer is fully inserted.

8.5.1 Producing ice cubes

The volume depends on the freezing temperature. The colder the temperature, the more ice cubes the system can produce in a certain time period.

After the IceMaker is turned on for the first time, it can take up to 24 hours for the first ice cubes to be made.

- Activate the IceMaker function .
- To make a high number of ice cubes: Activate the MaxIce function.
- Distribute the ice cubes evenly in the drawer to increase the capacity.
- Closing the drawer: IceMaker starts making ice cubes again automatically.

Note

When a certain level is reached in the IceMaker drawer, it stops producing ice cubes. The IceMaker does not fill the drawer all the way to the top.

8.6 VarioSpace




Fig. 93

You can remove drawers and glass panels from your appliance. This provides more room for large food items such as poultry, joints of meat, large game, and tall baked products. You can then freeze these items whole for later preparation.

Note the weight limits on the drawers and glass panels (see 10.1 Technical specifications).

8.7 Freezer pack*

Freezer packs prevent the temperature rising too quickly should there be a power cut.

The freezer packs are in the drawer.

You can store the freezer packs in the freezer tray.*

8.7.1 Using the freezer pack




Fig. 94

When the freezer packs are fully frozen:

Place on the frozen goods in the top, front part of the freezer.

9 Maintenance

9.1 Disassembling / assembling pullout systems

9.1.1 Notes on disassembly

You can disassemble some of the pull-out systems for cleaning. Your appliance can contain a variety of pull-out systems.

The following pull-out systems can be disassembled or cannot be disassembled:

Pull-out system	can be disassembled / cannot be disassembled
Drawer on glass shelf*	can be disassembled (see Drawer on glass shelf*) *
Top tilting drawer*	cannot be disassembled*
Drawer on moulded rib	can be disassembled (see 9.1.3 Drawer on moulded rib)
Bottom drawer	cannot be disassembled
IceTower*	can be disassembled (see 9.1.4 IceTower*) *

9.1.2 Drawer on telescopic rails*


Drawer on glass shelf*

Disassembling pull-out system

Make sure the following prerequisites are met:

Drawer has been removed.

Glass shelf has been removed. (see 8.3 Glass shelves*)



- Fig. 95 Glass shelf with rails
- Push up front click-in hooks. (1)
- Move pull-out rails to the side (2) and to the rear (3).

Installing pull-out system




Fig. 96 Glass shelf with rails

- Hook in rail at the back. (1)
- Hook in rail at the front. (2)

9.1.3 Drawer on moulded rib

Disassembling pull-out system

Make sure the following prerequisites are met:

Drawer has been removed. (see 8.1.3 Drawer on moulded rib)

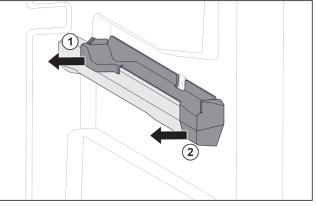


Fig. 97 Attachment on the right moulded rib

- Grab attachment at the back from below.
- Pull off attachment at the back sideways. Fig. 97 (1)
- Pull off attachment at the front sideways. Fig. 97 (2)

Maintenance

Installing pull-out system

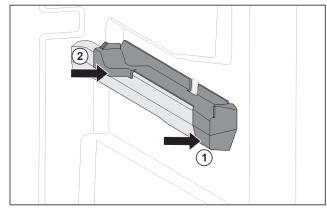


Fig. 98 Attachment on the right moulded rib


- Position attachment on moulded rib at the front. Fig. 98 (1)
- Press on attachment at the back. Fig. 98 (2)

9.1.4 IceTower*


Disassembling pull-out system

Make sure the following prerequisites are met:

- IceTower has been removed. (see 8.2 Pull-out board with IceTower*)
- Glass shelf has been removed. (see 8.3 Glass shelves*)
- Place pull-out board on a table.
- \triangleright You are able to remove the rails more easily from the glass shelf.



- Fig. 99 Glass shelf with rails and retaining parts
- Press down retaining part at the rear (see Fig. 99) and at the same time push the rail back.



- *Fig. 100 Glass shelf with rails and retaining parts* ▷ The rail hooks are released from the retaining part.
 ► Remove rail from retaining part
- Remove rail from retaining part.




Fig. 101 Glass shelf with retaining part

Remove retaining part from glass shelf sideways.

Installing pull-out system




Fig. 102 Glass shelf with retaining part

- Fit retaining part on glass shelf.
- Push retaining part onto glass shelf as far as it will go.




Fig. 103 Damping mechanism

The damping mechanism is attached to the left rail. (see Fig. 103) There is no damping mechanism attached to the right rail.

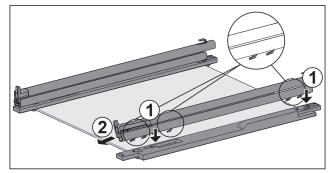


Fig. 104 Glass shelf with rails and retaining parts Install rail **with** damping mechanism:

- Place rail hooks onto the openings of the left retaining part. Fig. 104 (1)
- Push rail forwards. Fig. 104 (2)
- Rail latches in audibly. Install rail without damping mechanism:
- Place rail hooks onto the openings of the right retaining part. Fig. 104 (1)
- Push rail forwards. Fig. 104 (2)
- \triangleright Rail latches in audibly.

9.2 Defrosting the appliance

9.2.1 Defrosting with NoFrost

Defrosting is performed automatically with the NoFrost system. The moisture is deposited on the evaporator, is periodically defrosted and evaporates.

The appliance does not need to be defrosted.

Note

Water droplets may collect on the bottom of the appliance. When you take the appliance out of operation:

Place a towel in front of the appliance to catch any drops of water that may run out. (see 11 Shutting down)

9.3 Cleaning the appliance

9.3.1 Ready

Danger of electric shock!

Remove the refrigerator connector or interrupt the power supply.

Risk of fire

Do not damage the refrigeration circuit.

- Empty the appliance.
- Remove mains connector.


9.3.2 Clean the housing

NOTICE

Improper cleaning!

Damage to the appliance.

- Only use soft cleaning cloths and ph-neutral all-purpose cleaners.
- Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.



Risk of injury and damage as a result of hot steam! Hot steam can lead to burns and can damage the surfaces.

- Do not use any steam cleaners!
- ▶ Wipe the housing down with soft, clean cloth. If very dirty, use lukewarm water with a neutral cleaner. Glass surfaces can also be cleaned with glass cleaner.

9.3.3 Cleaning the interior

NOTICE

Improper cleaning!

- Damage to the appliance.
- Only use soft cleaning cloths and ph-neutral all-purpose cleaners.
- Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.
- Plastic surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.
- Metal surfaces: clean by hand with a soft clean cloth, lukewarm water and a little detergent.

9.3.4 Clean the components

NOTICE

Improper cleaning!

Damage to the appliance.

- Only use soft cleaning cloths and ph-neutral all-purpose cleaners.
- Do not uses abrasive sponges or steel wool which may cause scratches.
- Do not use any sharp or abrasive cleaning agents, nor any that contain sand, chloride or acid.

Clean with a soft, clean cloth, lukewarm water and some detergent:

- IceTower pull-out board*
- Drawer
- Please note: Do not remove the magnet on the drawer. The magnet ensures the functionality of the IceMaker.* Freezer trav*
- Components of the EasyTwist-Ice*

Clean with a damp cloth:*

Retractable rails Please note: The grease in the tracks is used for lubrication and must not be removed!

Wash in the dishwasher up to 60 °C:

- lce cube tray* lce cube scoop*
- To disassemble components: see the relevant section.
- Clean the components.

9.3.5 Cleaning the EasyTwist-Ice*

Clean the EasyTwist-Ice in the following situations:

- First use
- Not using for more than 48 hours
- When cleaning is required

Dismantling the EasyTwist-Ice

Make sure that the following requirements are fulfilled:

- □ The drawer has been removed. (see 8.1 Drawers)
- The drawer is placed on a table.





Fig. 105

- Removing the water tank: Lift the water tank by the recess Fig. 105 (1).
- Remove the water tank Fig. 105 (2) upwards.
- Remove the ice cube drawer *Fig. 105 (3)* to the front.



Maintenance

Fig. 106

- Removing the EasyTwist-Ice body: Use your finger to push the tab Fig. 106 (4) down and use your other hand to lift the EasyTwist-Ice body Fig. 106 (5) from behind at the same time.
- ▶ Remove the EasyTwist-Ice body from the freezer drawer.




Fig. 107

- Removing the EasyTwist-Ice body cover: Push the tabs Fig. 107 (6) on both sides of the EasyTwist-Ice body with one hand.
- ▶ Use the other hand to remove the cover Fig. 107 (7) upwards.
- ▷ EasyTwist-Ice is dismantled into four parts. (see Fig. 108)

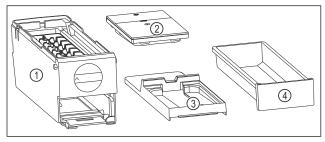


Fig. 108 Components of the EasyTwist-Ice

(1) EasyTwist-Ice body (3) Cover with ice cube tray

(2) Water tank

(4) Ice cube drawer

NOTICE

Risk of damage due to improper dismantling!

Equipment breaking, jumping and cracking. If you dismantle the EasyTwist-Ice body further, you may damage the rotary knob or other parts of the EasyTwist-Ice body.

- Only dismantle the EasyTwist-Ice into the components shown. (see Fig. 108)
- Clean the EasyTwist-Ice body Fig. 108 (1) as a whole.

Cleaning the EasyTwist-Ice

Make sure that the following requirements are fulfilled:

- □ The EasyTwist-Ice is dismantled. (see Dismantling the EasyTwist-Ice)
- Clean the ice cube drawer, water tank, cover and Easy-Twist-Ice body with warm water and a little detergent.
- Dry all cleaned components thoroughly with a dry cloth.
- \triangleright The EasyTwist-Ice is clean.

Installing the EasyTwist-Ice




Fig. 109

- ▶ Installing the EasyTwist-Ice body cover: Place the cover on the front. *Fig. 109 (1)*
- Lower the cover at the rear. Fig. 109 (2) ►
- \triangleright The cover locks into both tabs *Fig. 109 (3)* audibly.




Fig. 110

- Installing the EasyTwist-Ice body: Push the axes for the EasyTwist-Ice body into the guides Fig. 110 (4).
- Press the EasyTwist-Ice body Fig. 110 (5) down at the back.
- ▷ The EasyTwist-Ice body locks in audibly.




Fig. 111

Insert the ice cube drawer Fig. 111 (6).

WARNING Risk of poisoning due to contaminated water! Only fill the water tank with potable water.

* Depending on model and options

Customer help

- ▶ Fill the water tank with water.
- Insert the water tank.
- ► Insert the drawer. (see 8.1 Drawers)
- If you are using unfiltered water:
 Dispose of ice cubes that were produced 24 hours after initial ice cube production.

-or-

- If you are using filtered water:
- Dispose of ice cubes that were produced 48 hours after initial ice cube production.

9.3.6 Cleaning the IceMaker*

There are various options for cleaning the IceMaker.

Cleaning is required in the following cases:

- □ Initial operation
- With mains connection:* If out of use for more than 5 days.*

Ensure that the following conditions are met:

- □ IceMaker drawer is emptied.
- □ IceMaker drawer is in place.
- □ The IceMaker is activated.

First use or after a long period of non-use

Clean the IceMaker with the TubeClean function.

- Put an empty 1.5 l vessel (max. height 10 cm) in the drawer under the IceMaker.
- Activate the TubeClean function.
- The rinse process is prepared (max. 60 min.): Symbol flashes.
- ▷ Water pipes are rinsed: Symbol flashes.
- ▷ Rinsing process is complete: Function turns off automatically.
- Remove the IceMaker drawer and remove the container.
- Clean the IceMaker drawer with warm water and a little detergent.
- ▶ Push the IceMaker drawer in.
- \triangleright The system starts making ice cubes automatically.
- Dispose of any ice cubes that were made 24 hours after the first ice cubes.

If cleaning is required

- Clean the IceMaker by hand.
- Remove the IceMaker drawer and clean with warm water and a little detergent.
- Push the IceMaker drawer in.
- Dash The system starts making ice cubes automatically.

9.3.7 After cleaning

- ▶ Wipe the appliance and the components dry.
- Connect and switch on the appliance.
- Activate SuperFrost (see 7.2 Appliance functions). The temperature is cold enough:
- Place the food inside.
- Repeat cleaning regularly.

10 Customer help

10.1 Technical specifications

Temperature range		
Freeze	-28 °C to -15 °C	
Maximum freezing quantity/24 h		
Freezer compart- ment	See "Freezing capacity/24 h" on the type plate	

Maximum component capacity			
Features	Appliance width 550 mm (see instal- lation instruc- tions, appliance dimen- sions)		Appliance width 700 mm (see instal- lation instruc- tions, appli- ance dimen- sions)
Drawer on moulded rib (see 8.1.3 Drawer on moulded rib)	14 kg	19 kg	19 kg
Drawer on glass shelf* (see 8.1.1 Drawer on telescopic rails*) *	12 kg*	15 kg*	22 kg*
Bottom drawer (see 8.1.4 Bottom drawer)		11 kg	19 kg
Top tilting drawer* (see 8.1.2 Top tilting drawer*) *	*	19 kg*	19 kg*

Ice cube production with IceMaker*

Ice cube produc- tion/24 h	At a temperature of -18 °C: 0.8 kg of ice cubes
	With the MaxIce function on: 1.2 kg of ice cubes

Ice cube production with EasyTwist-Ice*

Time required at -18 °C	approx. 5.5 h	
Time required with SuperFrost activated	approx. 3 h	

10.2 Operating noises

The appliance makes different noises when it is on.

- At higher temperatures the appliance uses less energy but works for longer. It is quieter.
- At lower temperatures the food is cooled faster. It is louder.
 - Examples:
 - Functions on (see 7.2 Appliance functions)
 - Fan running
 - Food recently added
 - High ambient temperature
 - Door open for a while

Noise		Possible cause		Type of noise	
Bubbling splashing	and	Coolant into the circuit.			operating
Hissing		Coolant into the circuit.			operating

Customer help

Noise		Possible cause		Type of noise	
Humming			appliance ng. The depends cooling	Nori nois	mal operating e
Humming rustling	and	The fan is	running.	Nori nois	mal operating e
Clicking		Components are switched on and off.		Nori nois	mal switching e
Rattling humming	or	Valves or working.	flaps are	Nori nois	mal switching e
Faint knock humming buzzing*	king, or	The valve	is active.	Nori nois	nal operating e
Noise	Possible cause		Type of noise		Lifting
Vibration	Improper setup		Defective noise		Level the appliance using the adjustable feet.

Noise	Possible cause	Type of noise	Lifting
Rattling	Components, items inside the appliance	Defective noise	Secure components. Leave enough space between the items.

10.3 Technical fault

Your appliance is designed and built to ensure it works reliably and has a long service life. In the unlikely event that a fault occurs during operation, please check whether it is due to an operating error. If so, you will be charged for the callout and repair costs even if it falls within the warranty period.

You can fix the following faults yourself.

10.3.1 Appliance function

Defect	Cause	Remedy
The appliance is	\rightarrow The appliance is not switched on.	Switch the appliance on.
not working.	→ The power plug is not properly plugged into the socket.	 Check the power plug.
	→ There is something wrong with the power outlet fuse.	Check the fuse.
	→ Power cut	 Keep the appliance closed. Protecting food: Lay freezer packs on top of the food or use another freezer if the power is off for a prolonged period. Do not re-freeze defrosted food,
	→ The appliance plug does not fit the appliance properly.	 Check the appliance plug.
Temperature is not cold enough.	→ The appliance door is not closed properly.	 Close the appliance door.
	\rightarrow Not enough ventilation.	 Keep ventilation grille clear, and clean it.
	→ The ambient temperature is too high.	Problem solution: (see 1.4 Appliance range of use)
	→ The appliance was opened too many times or for too long.	 Wait to see if the required temperature corrects itself. If not, contact Customer Service. (see 10.4 Customer Service)
	→ Too much fresh food was placed inside without SuperFrost.	 Solution: (see SuperFrost)
	→ The temperature is set incorrectly.	► Turn down the temperature and check after 24 hours.
	→ The appliance is too close to a heat source (oven, radiator, etc).	Move the appliance or the heat source.
The door seal is defective or needs to be replaced for another reason.	→ The door seal can be replaced. It can be replaced without the need for special tools.	 Contact Customer Service. (see 10.4 Customer Service)

Defect	Cause	Remedy	
The appliance builds up too much ice or condensa- tion.	→ The door seal may have slipped out of its groove.	 Check that the door seal is well fitted in the groove. 	
The appliance is hot to touch on the outside*.	→ The heat of the refrigeration circuit is used to avoid condensation.	 This is normal. 	

10.3.2 Features

Defect	Cause	Remedy	
You cannot acti- vate the IceMaker.*	→ The appliance and therefore the IceMaker are not connected.	 Connect the appliance (see the Installation Guide). 	
The IceMaker is not producing ice cubes.*	→ The IceMaker is not on.	 Activate the IceMaker. 	
	→ The drawer of the IceMakers is not connected properly.	Push the drawer in correctly.	
	→ The water connection is not open.	Open the water connection.*	

10.4 Customer Service

First check whether you can rectify the fault yourself (see 10 Customer help). If you cannot rectify the problem, contact Customer Service.

You can find the address in the enclosed brochure "Liebherr-Service" or at home.liebherr.com/service.



Unprofessional repair!

Injuries.

- Have any repairs and action not expressly specified on the appliance and mains cable carried out by service personnel only. (see 9 Maintenance)
- A damaged mains cable may only be replaced by the manufacturer, the manufacturer's Customer Service or a similarly qualified person.
- In the case of appliances with an IEC connector, the change may be made by the customer.

10.4.1 Contacting Customer Service

Make sure that the following appliance information is available:

- Appliance name (model and index)
- Service no. (Service)
- Serial no. (S no.)
- Call up the appliance information via the display. (see Device information)
- -or-
- Refer to the type plate for appliance information. (see 10.5 Model plate)
- ▶ Note down the appliance information.
- Notify customer service: Report errors and the appliance information.
- \triangleright This will help us to provide you with a faster, more accurate service.
- Follow further instructions from Customer Service.

10.5 Model plate

The model plate is behind the drawers on the inside of the appliance.




Fig. 112

- (1) Appliance description (3) Serial no.
- (2) Service no.

Note the data on the model plate.

11 Shutting down

- Empty the appliance.
- Deactivate IceMaker. (see Deactivating IceMaker) *
- Switch off appliance. (see Turn off appliance)
- Remove mains connector.
- Remove appliance connector if required: Remove and move from left to right at the same time.
- Place a towel in front of the appliance to catch any drops of water that may run out.
- Clean appliance. (see 9.3 Cleaning the appliance)
- Leave the door open, so that no unpleasant odours arise.

12 Disposal

12.1 Preparing appliance for disposal



Liebherr uses batteries in some of its appliances. In the EU, for environmental reasons, legislation obliges the end user to remove these batteries before disposing of old appliances. If your appliance contains batteries, a corresponding notice is attached.

Lamps

If you can remove the lamps yourself without destroying them, also remove these before disposal.

- ► Take the appliance out of operation.
- Appliances with batteries: remove the batteries. For description, see Maintenance chapter.
- ▶ If possible: remove lamps without destroying them.

12.2 Disposing of the appliance in an environmentally friendly manner



The appliance still contains valuable materials and must be disposed of separately from unsorted municipal waste.



Lamps

For Germany:

Dispose of batteries separately from the old appliance. To do this, you can return the batteries free of charge to retailers as well as recycling centres and collection centres for recyclable materials.

Dispose of removed lamps via the respective collection systems.

You can dispose of the appliance free of charge via the class 1 collection containers at the local recycling and recyclable material collection centres. When purchasing a new fridge/freezer, if the sales area > 400 m², retailers will also take back the old appliance free of charge.

Leaking coolant and oil!

Fire. The coolant contained in the appliance is eco-friendly, but also flammable. The oil contained in the appliance is flammable. Escaping coolant and oil can ignite if the concentration is high enough and in contact with an external heat source.

- ► Do not damage the pipelines of the coolant circuit and the compressor.
- ▶ Transport the appliance without damaging it.
- Dispose of batteries, lamps and the appliance according to the above specifications.



home.liebherr.com/fridge-manuals



Issue date: 20240304

Part number index: 7088347-01

Liebherr-Hausgeräte Ochsenhausen GmbH Memminger Straße 77-79 88416 Ochsenhausen Deutschland